
## **Technical data sheet**

Protection conductor terminal, with screw contacts, 7 terminals

**Item number: 2054019** 





Protective conductor connection terminal with 7 terminals up to 16 mm<sup>2</sup>.

Clamping rail, brass, steel screws, electrogalvanised and transparently passivated, for snapping onto 35 x 7.5 mm hat profile rails to DIN EN 60715 (previously DIN EN 50022) (transverse) or flat rails 10 x 2–2.5 mm (lengthwise). 60/N 7 and 60/S 7: with 7 terminals to 16 mm².

Fluor





PA

Polyamide

## Master data


Item number	2054019
Description 1	Protective conductor terminal
Manufacturer	OBO
Dimension	7x16mm²
Colour	Green
Material	Polyamide
Smallest sales unit	10
Unit of quantity	Piece
Weight	2.9 kg
Weight unit	kg/100 pc.

## **Technical data sheet**

Protection conductor terminal, with screw contacts, 7 terminals

**Item number: 2054019** 



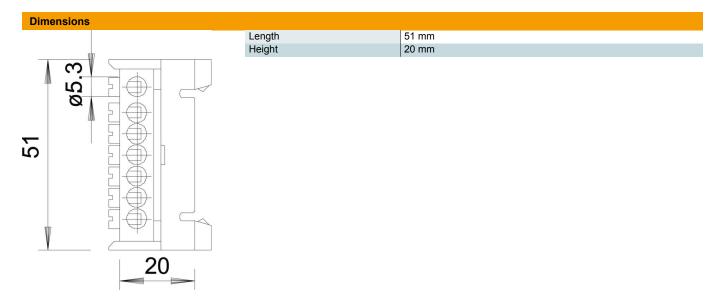

		ata

Closing plate required	no
No. of terminals	7
Explosion-tested version	no
Suitable for flexible conductors	no
Suitable for solid conductors	no
Suitable for multi-wire conductors	no
Mounting type	DIN rail 35 mm
Nominal cross-section, max.	16 mm²
Nominal cross-section, min.	10 mm²
Pole number	7
Cross-section	7 terminals to 16 mm² mm²