


# Technical data sheet

Roof hook for PV module mounting, screwable profile, tiled roof, black

Item number: 5901406

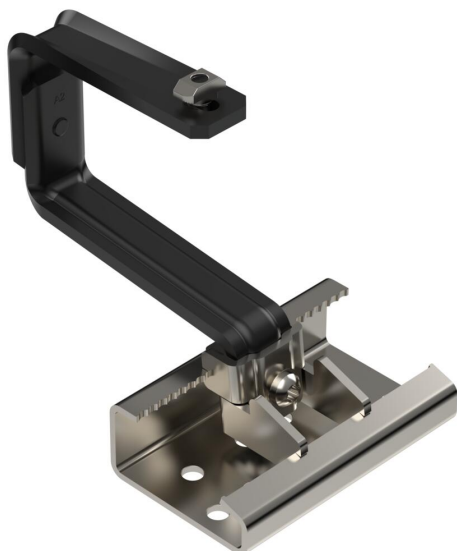

Roof hook to mount photovoltaic modules on pitched roofs in combination with the TP 45 support profile. Suitable for tiled roofs. Screwable fastening on the support profile. Mounting on rafters with TKS wafer-head screws. The roof hook can be adjusted horizontally as well as vertically continuously via glands, correct-Torx 40 key. Height adjustment in the range of the roof slat between 40–54 mm, side adjustment option up to 76 mm, height adjustment of the support profile up to 18 mm. Black version.



**A2** Stainless steel

**P** Powder-coated

## Master data

|                     |                              |
|---------------------|------------------------------|
| Item number         | 5901406                      |
| Type                | DHU T A2K S                  |
| Description 1       | Roof hook, screwable profile |
| Description 2       | for pitched roof system      |
| Manufacturer        | OBO                          |
| Dimension           | 120x186x150                  |
| Colour              | Black                        |
| Material            | Stainless steel 1.4301       |
| Surface             | Powder-coated                |
| Surface standard    |                              |
| Smallest sales unit | 10                           |
| Unit of quantity    | Piece                        |
| Weight              | 108.5 kg                     |
| Weight unit         | kg/100 pc.                   |


# Technical data sheet

Roof hook for PV module mounting, screwable profile, tiled roof, black

Item number: 5901406



## Dimensions



|       |        |
|-------|--------|
| Width | 120 mm |
|-------|--------|

## Technical data

|                                                           |                        |
|-----------------------------------------------------------|------------------------|
| Material thickness                                        | 6 mm                   |
| With fastening material                                   | no                     |
| With mounting plate                                       | yes                    |
| Angle of inclination, max.                                | 0 °                    |
| Angle of inclination, min.                                | 90 °                   |
| Adjustable                                                | yes                    |
| Suitable for fastening photovoltaic roof/facade fastening | Pitched roof fastening |
| Suitable for roof material                                | Roof tile              |
| Wide fastening plate                                      | 75 mm                  |
| Fastening plate, length                                   | 120 mm                 |
| Height-fastening plate                                    | 36 mm                  |
| Penetration of roof necessary                             | yes                    |
| Alignment                                                 | Horizontal/vertical    |
| Anchoring                                                 | Bolts                  |