


Technical data sheet

Height-adjustable cassette with brush bar, RKSBN, stainless steel

Item number: 7406603

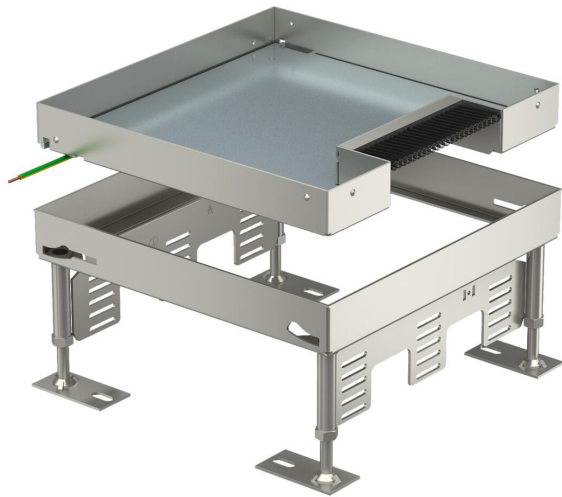

Height-adjustable cassette of nominal size 9 with cord outlet via brush bar for installation of accessories in dry-cleaned floors. Up to 10 installation devices of type FLF can be installed.



A2 Stainless steel

Master data

Item number	7406603
Type	RKS BN V9 25
Description 1	Square cassette
Description 2	with brush bar
Manufacturer	OBO
Dimension	243x243mm
Material	Stainless steel 1.4301
Smallest sales unit	1
Unit of quantity	Piece
Weight	438 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	21,5276 kg CO2e / 1 Piece

Technical data sheet

Height-adjustable cassette with brush bar, RKS N, stainless steel


Item number: 7406603



Dimensions



Length	243 mm
Width	243 mm
Height	110 mm

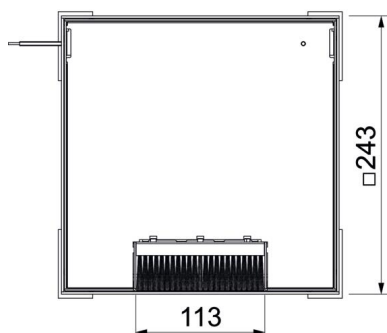

Technical data

Number of installable devices	12
Number of mounting boxes	3
Number of cable outlets	1
Cover version	Square
Cable outlet version	Brush bar
Floor care	Dry
Decouplable	no
Floor height, max.	155 mm
Floor height, min.	110 mm
Suitable for raised floor installation	yes
Suitable for cavity floor installation	yes
Suitable for underfloor box	250/350
Device support to accept mounting boxes	yes
Length of installation dimensions	242.8 mm
Nominal size for device installation units	9
Height-adjustment range, max.	155 mm
Height-adjustment range, min.	110 mm
ROHS-conformant	Exempt
Protection rating (IP) when used	IP10
Protection rating (IP) when unused	IP10
Protection rating IK code	IK10
Heavy-duty version	no
Vertical load, large area	to 5,000 N
Vertical load, small area	to 3,000 N
Floor covering thickness	25 mm