



Quick-Pipe®


Intelligent combination of classic pipe system
and open cable routing



Intelligent combination of classic pipe system and open cable routing

The Quick-Pipe® system combines the benefits of classic pipe installation with those of open cable routing, offering an intelligent solution for surface-mounted installations on walls and ceilings. It protects cables reliably against damage, dust and soiling. Quick-Pipe is suitable for a wide variety of uses, for 230 V cables but also for data cables, e-optic cables, coax cables and telephone cables. Of course, the system is tested to VDE 0604.

Insert, turn – and you're done.

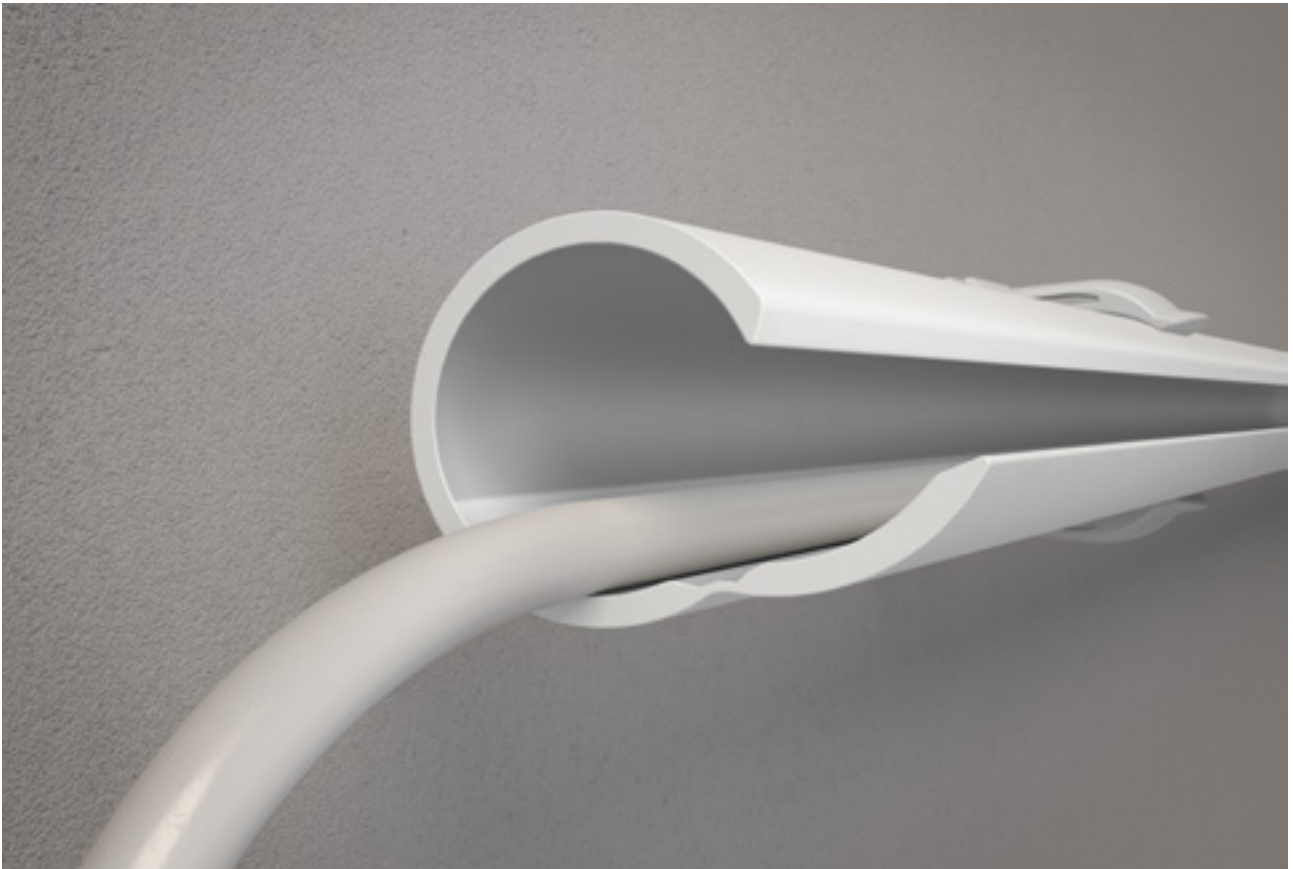

The Quick-Pipe® system combines the benefits of cable ducts and conventional electrical installation pipes to produce a single, intelligent system for surface-mounted installations.

It makes routing and retrofitting cables significantly easier: The tedious threading process is no longer necessary and retroinstallations are possible at any time – in fact, they are even easier than an initial installation.

Advantages at a glance

- 4 sizes: M16, M20, M25 and M32
- Two colours – white and grey
- Simple installation
- Retroinstallation possible
- VDE-approved



Cables are inserted in the opened Quick-Pipe® electrical installation pipes, just like in an open cable duct.



After the cables are inserted, the Quick-Pipe® is turned in the Quick clip to securely lock it in place.



Retroinstallation is also no problem, because a twist is all it takes to open the Quick-Pipe® again.

Perfectly matched

Quick-Pipe® system fittings



The Quick-Pipe® system enables especially fast, uncomplicated installation. Perfectly matched fittings, which can be opened and closed again without tools, complete the system. It is compatible with Quick-Pipe® electrical installation pipes and corrugated pipes.

The optimised hinge ensures maximum efficiency, as one single component enables easy unfolding and can be opened and closed any number of times – ideal for flexible retroinstallations.

Advantages at a glance:

- Available in the sizes M16, M20, M25 and M32
- Can be used in the temperature range –25 to +60 °C
- Manufactured from halogen-free material



Quick-Pipe® T piece

T branches are no longer an obstacle. Simply attach them, open them – and you're done.



Quick-Pipe® 90° bend

Perfect for internal and external corners: the Quick-Pipe® 90° bend.




Quick-Pipe® connecting sleeve

Ensures a reliable connection of Quick-Pipe® electrical installation pipes.


OBO Quick series

Arrangeable cable and pipe clips

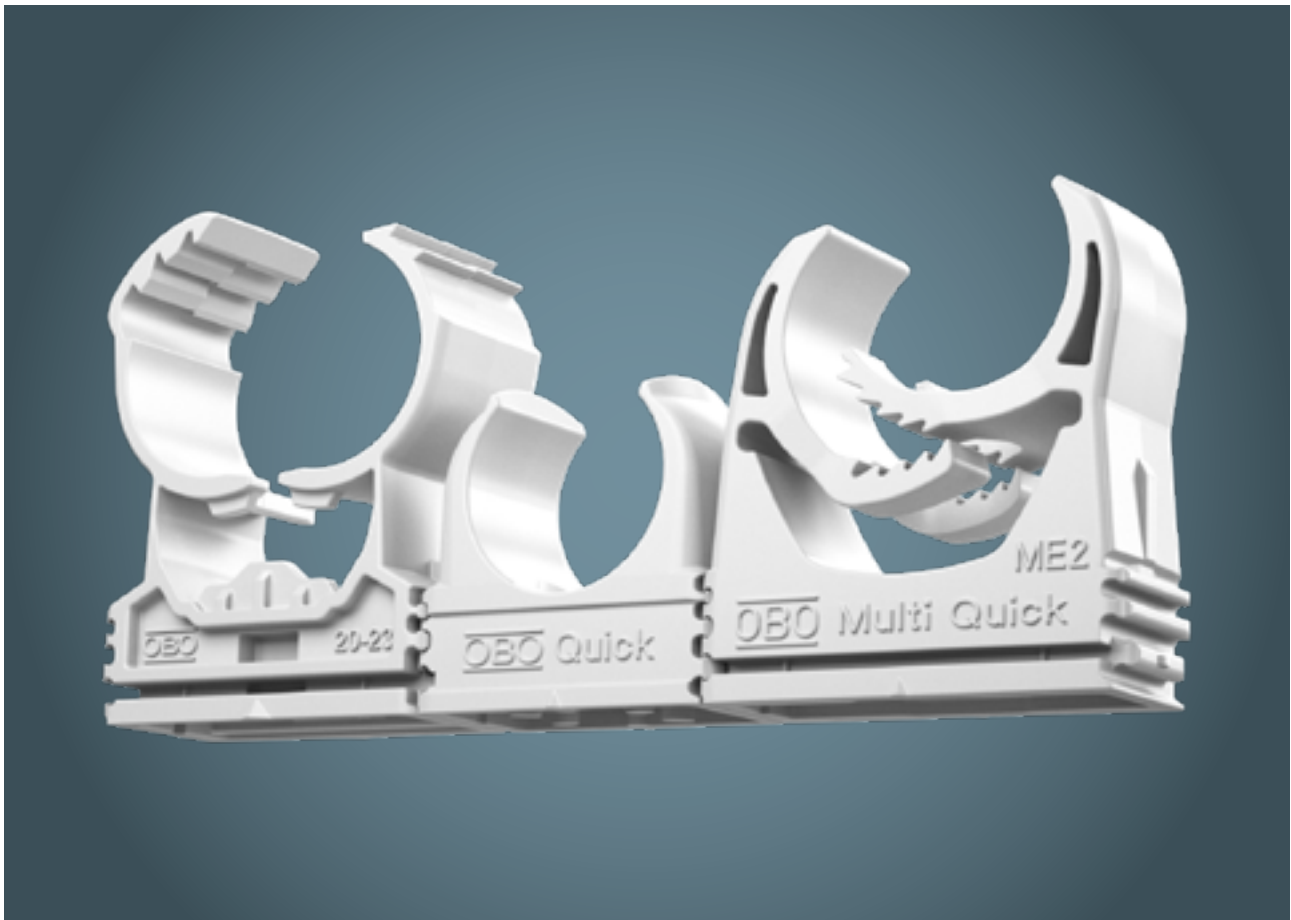

The OBO Quick series features three types of halogen-free pipe clips for the time-saving, secure fastening of cables and electrical installation pipes. Benefit from short mounting times – both on walls and ceilings, as well as indoors and outdoors.


Thanks to the standardised arrangement contour, all clip types and sizes of the OBO Quick series can be interconnected easily. This means you can mount up to three clips with a single drill hole. The patented shape of the arrangement contour permits a particularly high carrying capacity.

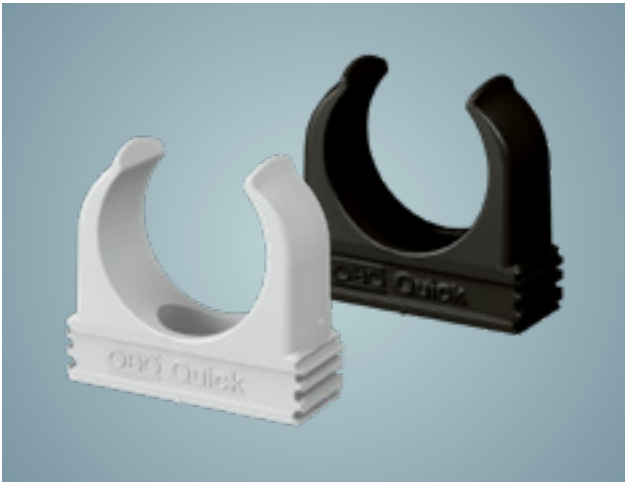

Quick clip

The high-speed clip

- Extreme loading capacity
- Maximum stability
- Extremely easy mounting
- Insertion slopes
- Slot fastening
- Suitable for lining up
- Latch-in hole/middle stopper

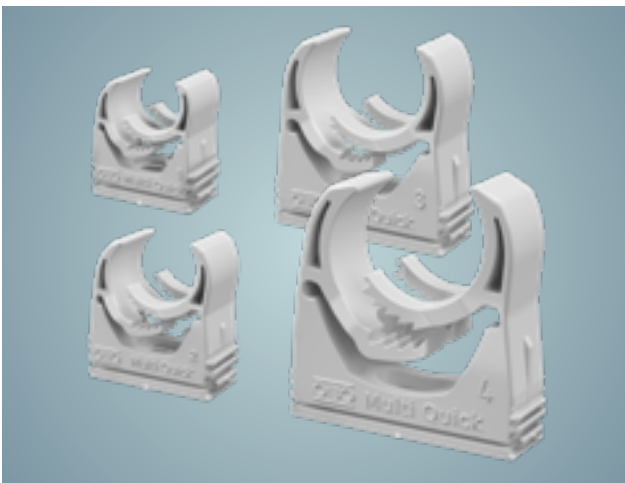

Multi-Quick clip

The universal clip

- 4 sizes: clamping ranges from 15–37 mm
- PG and metric
- Easy fastening
- Secure locking
- Radial arrangement
- Simplified storage
- Universal application



proQuick clip

The safety clip

- Highly resilient and flexible
- Universal application
- Tool-free clip lock
- Optimised grip for a secure hold
- Robust and long-life
- Maximum efficiency and safety

Quick-Pipe®

PVC

IP
44


M



Open plastic Quick-Pipe® pipe for surface-mounted routing of cables in interiors and protected outdoor areas. Mounting on wall and ceiling with Quick clip, proQuick clip and Multi-Quick clip. Toolless closing and opening through turning in the clip. Can be used in a temperature range of -25 to +60 °C.

Type	Size	Colour	Length mm	Min. order- ing quan- tity m	Item no.
2953 M16 LGR	M16	Light grey	2000	50	2153904
2953 M20 LGR	M20	Light grey	2000	40	2153912
2953 M25 LGR	M25	Light grey	2000	30	2153920
2953 M32 LGR	M32	Light grey	2000	20	2153939
2953 M16 RW	M16	Pure white	2000	50	2153960
2953 M20 RW	M20	Pure white	2000	40	2153963
2953 M25 RW	M25	Pure white	2000	30	2153966
2953 M32 RW	M32	Pure white	2000	20	2153969

Dimensions

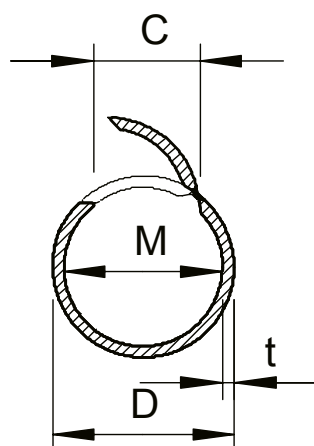

Type	Dim. t mm	Dim. C mm	Dim. D mm	Dimen- sion M
2953 M16 LGR	1.2	8.2	15.6	13.2
2953 M20 LGR	1.5	10	20	17
2953 M25 LGR	1.6	13.6	25	21.8
2953 M32 LGR	1.7	17	32	28.6

PVC



Set of Quick clips and Quick-Pipe® pipes


Type	Size	Colour	Set consisting of	Min. order- ing quan- tity Piece	Item no.
2954 M16 LGR	M16	Light grey	50 m Quick pipe and 156x OBO Quick clip	1	2154501
2954 M20 LGR	M20	Light grey	40 m Quick pipe and 120x OBO Quick clip	1	2154528
2954 M25 LGR	M25	Light grey	30 m Quick pipe and 96x OBO Quick clip	1	2154536
2954 M32 LGR	M32	Light grey	20 m Quick pipe and 60x OBO Quick clip	1	2154544



Set consisting of Quick-Pipe® electrical installation pipes and Quick clip surface-mounted clips. For surface-mounted routing of cables in interiors and protected outdoor areas. Universal fastening on wall and ceiling. Depending on diameter, the set comprises up to 50 m of pipe each of 2 metres in length and up to 156 Quick clips. Can be used in a temperature range of -25 to + 60 °C.

Type	Dimen- sion M	Dim. t mm	Dim. C mm	Dim. D mm
2954 M16 LGR	13,2	1,2	8,2	15,6
2954 M20 LGR	17	1,5	10	20
2954 M25 LGR	21,8	1,6	13,6	25
2954 M32 LGR	28,6	1,7	17	32

Dimensions

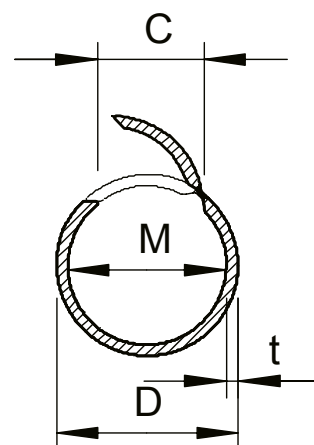

Quick-Pipe® T piece

PP

IP
44

M

100%
cotton


D'E



Fitting for plastic electrical installation pipes to create T branches. Suitable for Quick-Pipe® pipes or corrugated pipes. Toolless closing and opening. Can be used in a temperature range of -25 to +60 °C.

Type	Size	Dim. B2 mm	Height mm	Min. order- ing quan- tity Piece	Item no.
3000 TMS M16 LGR	M16	94	18	10	2153839
3000 TMS M20 LGR	M20	110	23	5	2153841
3000 TMS M25 LGR	M25	123	28	5	2153843
3000 TMS M32 LGR	M32	135	35	5	2153845
3000 TMS M16 RW	M16	Pure white	18	10	2153951
3000 TMS M20 RW	M20	Pure white	23	5	2153953
3000 TMS M25 RW	M25	Pure white	28	5	2153955
3000 TMS M32 RW	M32	Pure white	35	5	2153957

Dimensions

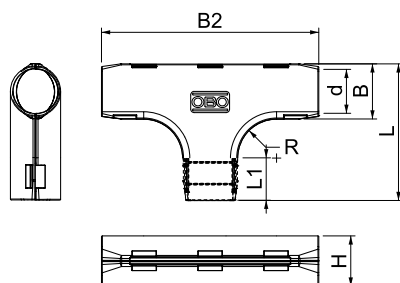

Type	Dim. L mm	Dim. B mm	Dim. B2 mm	Dim. L1 mm	Dim. d mm	Dim. R mm
3000 TMS M16 LGR	58	21	94	17	16	20
3000 TMS M20 LGR	69	26	110	20	20	22
3000 TMS M25 LGR	77	31	123	24	25	22
3000 TMS M32 LGR	87	39	135	26	32.6	22

PP

IP
44

M



Type	Size	Colour	Height mm		Item no.
3000 BMS M16 LGR	M16	Light grey	18		2154052
3000 BMS M20 LGR	M20	Light grey	23		2154054
3000 BMS M25 LGR	M25	Light grey	28		2154056
3000 BMS M32 LGR	M32	Light grey	35		2154058
3000 BMS M16 RW	M16	Pure white	18	10	2154062
3000 BMS M20 RW	M20	Pure white	23	5	2154064
3000 BMS M25 RW	M25	Pure white	28	5	2154066
3000 BMS M32 RW	M32	Pure white	35	5	2154068


90° Quick-Pipe® bend



Fitting for plastic electrical installation pipes to create 90° bends. Suitable for Quick-Pipe® pipes or corrugated pipes. Toolless closing and opening. Can be used in a temperature range of -25 to +60 °C.

Type	Dim. B mm	Dim. L mm	Dim. L1 mm	Dim. R mm	Dim. d mm
3000 BMS M16 LGR	21.4	69	28	20	15.6
3000 BMS M20 LGR	26.3	83.2	35	22	20
3000 BMS M25 LGR	31.2	91	38	22	25
3000 BMS M32 LGR	38.8	103	42	22	32.6

Dimensions

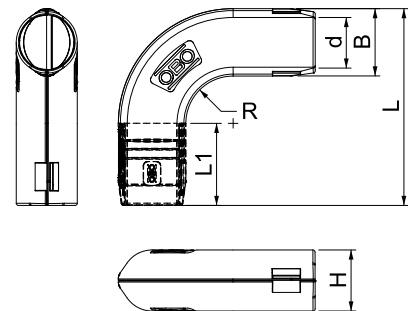

Quick-Pipe® connecting sleeve

PP

IP 44

M

WEEE


RoHS



Connecting sleeve for plastic electrical installation pipes to create straight connections. Suitable for Quick-Pipe® pipes or corrugated pipes. Toolless closing and opening. Can be used in a temperature range of -25 to +60 °C.

Type	Size	Colour	Height mm	Min. ordering quantity Piece	Item no.
3000 MMS M16 LGR	M16	Light grey	18	10	2154081
3000 MMS M20 LGR	M20	Light grey	23	10	2154083
3000 MMS M25 LGR	M25	Light grey	28	10	2154085
3000 MMS M32 LGR	M32	Light grey	35	10	2154087
3000 MMS M16 RW	M16	Pure white	10		2154091
3000 MMS M20 RW	M20	Pure white	10		2154093
3000 MMS M25 RW	M25	Pure white	10		2154095
3000 MMS M32 RW	M32	Pure white	10		2154097

Dimensions

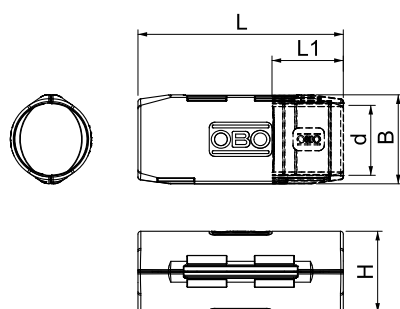

Type	Dim. L mm	Dim. B mm	Dim. L1 mm	Dim. d mm
3000 MMS M16 LGR	52	21	18	15.6
3000 MMS M20 LGR	65	26	23	20
3000 MMS M25 LGR	72	31	25	25
3000 MMS M32 LGR	80	39	28	32.6

Quick-Pipe® shears


IP 44

M



Shears for burr-free cutting of Quick-Pipe® electrical installation pipe Ø 16–32 mm.

Type	Cutting area mm	Min. ordering quantity Piece	Item no.
SQ 1632	16-32	1	2153572

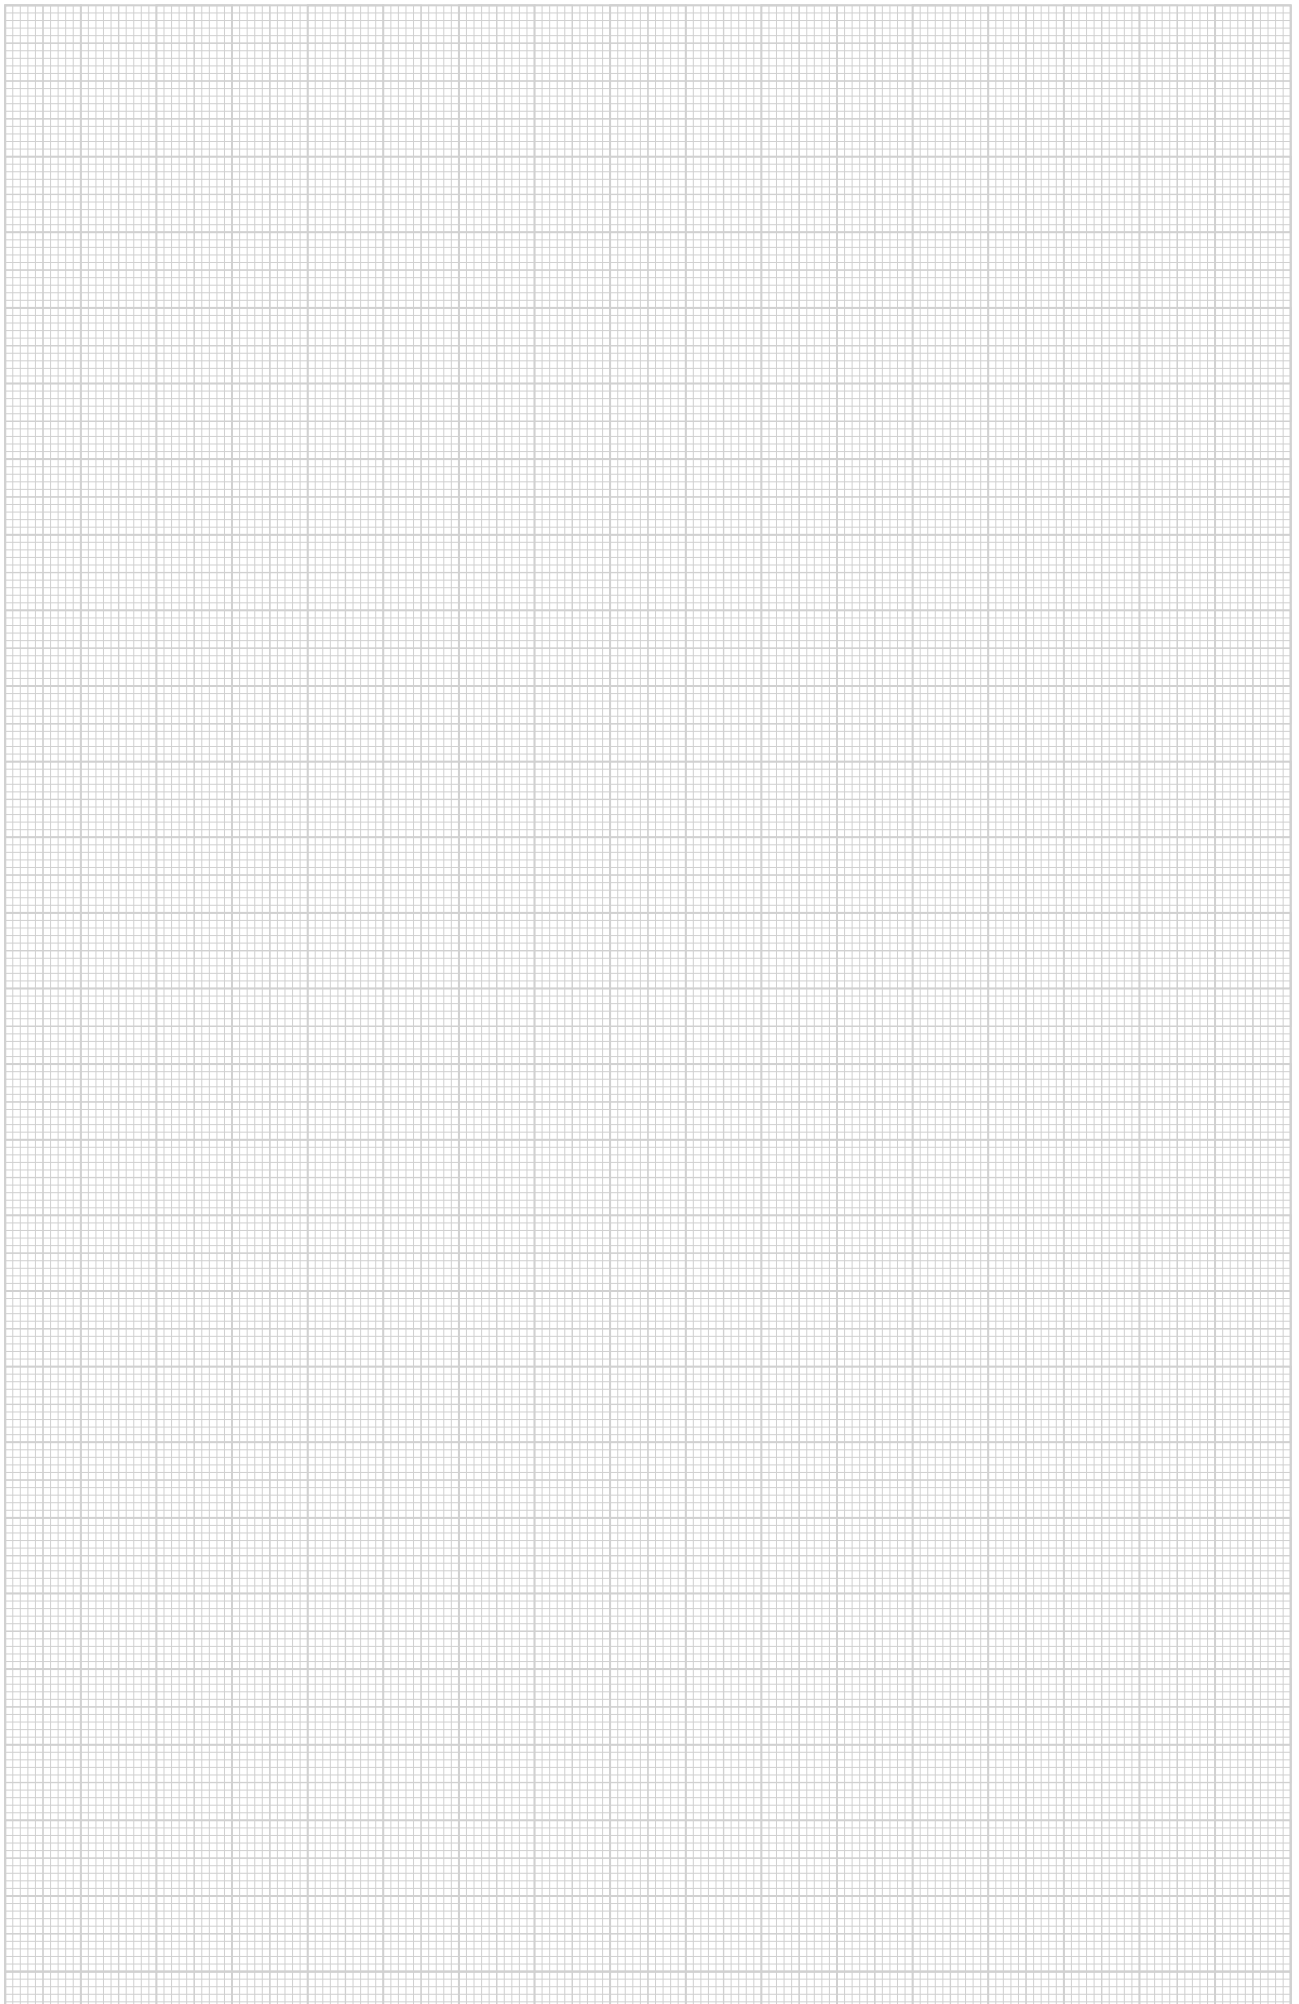

Quick clip


PP



Type	Nominal size	Colour	Min. ordering quantity Piece	Item no.
2955 M16	M16	Light grey	100	2149004
2955 M20	M20	Light grey	100	2149010
2955 M25	M25	Light grey	100	2149016
2955 M32	M32	Light grey	50	2149022
2955 M40	M40	Light grey	50	2149028
2955 M50	M50	Light grey	25	2149034
2955 M63	M63	Light grey	20	2149040

Flush-mounted clip to accept metric steel armoured pipes and heavy-duty insulating pipes, as well as Quick Pipe electrical installation pipes. Universal fastening options on walls and ceilings, both in indoor and protected outdoor areas. With slot for side alignment during mounting with wood screw or knock-in anchor. Toolless pipe mounting. Can also be arranged with OBO Multi-Quick or proQuick clip. M16 - M32 size can be screwed onto M6 thread. Recommended fastening spacing 50–60 cm, for max. extraction values F at a room temperature of 20 °C, see the table.

Dimensions



Type	Nominal size	Dim. A mm	Dim. B mm	Dim. C mm	Dim. D mm	Dim. E mm	Dim. F mm	Dim. H mm	Dim. h mm	Pull-out value N
2955 M16	M16	25.3	16	11.5	15.5	7	4.2	25	10	65
2955 M20	M20	30.3	16	14	19.4	9	4.2	29.5	10	75
2955 M25	M25	36.3	16	17.5	24.3	12	4.2	34	10	100
2955 M32	M32	46.3	16	22.4	31.4	12	4.2	42	11	100
2955 M40	M40	57.3	16	26	39.2	11	4.6	51	12	110
2955 M50	M50	70.3	18	32	49	12	6	63	14	135
2955 M63	M63	87.3	20	43	61.5	12	6	74.5	15	175

PP

M




Quick clip, black

Type	Nominal size	Colour	Min. ordering quantity	Piece	Item no.
2955 M16 SW	M16	Jet black	100		2149559
2955 M20 SW	M20	Jet black	100		2149563
2955 M25 SW	M25	Jet black	100		2149567
2955 M32 SW	M32	Jet black	50		2149571
2955 M40 SW	M40	Jet black	50		2149575
2955 M50 SW	M50	Jet black	25		2149579
2955 M63 SW	M63	Jet black	20		2149583

Flush-mounted clip to accept metric steel armoured pipes and heavy-duty insulating pipes, as well as Quick Pipe electrical installation pipes. Universal fastening options on walls and ceilings, both in indoor and protected outdoor areas. With slot for side alignment during mounting with wood screw or knock-in anchor. Toolless pipe mounting. Can also be arranged with OBO Multi-Quick or proQuick clip. M16 - M32 size can be screwed onto M6 thread. Recommended fastening spacing 50–60 cm, for max. extraction values F at a room temperature of 20 °C, see the table.

Type	Nominal size	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. H	Dim. h	Pull-out value N
2955 M16 SW	M16	25.3	16	11.5	15.5	7	4.2	25	10	65
2955 M20 SW	M20	30.3	16	14	19.4	9	4.2	29.5	10	75
2955 M25 SW	M25	36.3	16	17.5	24.3	12	4.2	34	10	90
2955 M32 SW	M32	46.3	16	22.4	31.4	12	4.2	42	11	100
2955 M40 SW	M40	57.3	16	26	39.2	11	4.6	51	12	110
2955 M50 SW	M50	70.3	18	32	49	12	6	63	14	135
2955 M63 SW	M63	87.3	20	43	61.5	12	6	74.5	15	175

Dimensions




Quick Clip, flame-resistant, stone grey



Type	Nominal size	Colour	Min. ordering quantity Piece	Item no.
2955 F M16 STGR	M16	Stone grey	100	2149303
2955 F M20 STGR	M20	Stone grey	100	2149309
2955 F M25 STGR	M25	Stone grey	100	2149315
2955 F M32 STGR	M32	Stone grey	50	2149321
2955 F M40 STGR	M40	Stone grey	50	2149327
2955 F M50 STGR	M50	Stone grey	25	2149333
2955 F M63 STGR	M63	Stone grey	20	2149339

Flame-resistant, flush-mounted clip to accept metric steel armoured pipes and heavy-duty insulating pipes, as well as Quick Pipe electrical installation pipes. Universal fastening options on walls and ceilings, both in indoor and protected outdoor areas. With slot for side alignment during mounting with wood screw or knock-in anchor. Toolless pipe mounting. Can also be arranged with OBO Multi-Quick or proQuick clip. M16 - M32 size can be screwed onto M6 thread. Recommended fastening spacing 50–60 cm, for max. extraction values F at a room temperature of 20 °C, see the table.

Dimensions



Type	Nominal size	Dim. A mm	Dim. B mm	Dim. C mm	Dim. D mm	Dim. E mm	Dim. F mm	Dim. H mm	Dim. h mm	Pull-out value N
2955 F M16 STGR	M16	25.3	16	11.5	15.5	7	4.2	25	10	65
2955 F M20 STGR	M20	30.3	16	14	19.4	9	4.2	29.5	10	75
2955 F M25 STGR	M25	36.3	16	17.5	24.3	12	4.2	34	10	90
2955 F M32 STGR	M32	46.3	16	22.4	31.4	12	4.2	42	11	100
2955 F M40 STGR	M40	57.3	16	26.0	39.2	11	4.6	51	12	110
2955 F M50 STGR	M50	70.3	18	32	49	12	6	63	14	135
2955 F M63 STGR	M63	87.3	20	43	61.5	12	6	74.5	7	175


Quick clip, flame-resistant, pure white



Type	Nominal size	Colour	Min. ordering quantity Piece	Item no.
2955 F M16 RW	M16	Pure white	100	2149351
2955 F M20 RW	M20	Pure white	100	2149357
2955 F M25 RW	M25	Pure white	100	2149363
2955 F M32 RW	M32	Pure white	50	2149369
2955 F M40 RW	M40	Pure white	50	2149375

Flame-resistant, flush-mounted clip to accept metric steel armoured pipes and heavy-duty insulating pipes, as well as Quick Pipe electrical installation pipes. Universal fastening options on walls and ceilings, both in indoor and protected outdoor areas. With slot for side alignment during mounting with wood screw or knock-in anchor. Toolless pipe mounting. Can also be arranged with OBO Multi-Quick or proQuick clip. M16 - M32 size can be screwed onto M6 thread. Recommended fastening spacing 50–60 cm, for max. extraction values F at a room temperature of 20 °C, see the table.

Dimensions



Type	Nominal size	Dim. A mm	Dim. B mm	Dim. C mm	Dim. D mm	Dim. E mm	Dim. F mm	Dim. H mm	Dim. h mm	Pull-out value N
2955 F M16 RW	M16	25.3	16	11.5	15.5	7	4.2	25	10	65
2955 F M20 RW	M20	30.3	16	14	19.4	9	4.2	29.5	10	75
2955 F M25 RW	M25	36.3	16	17.5	24.3	12	4.2	34	10	90
2955 F M32 RW	M32	46.3	16	22.4	31.4	12	4.2	42	11	100
2955 F M40 RW	M40	57.3	16	26.0	39.2	11	4.6	51	12	110

PA




Multi-Quick clip

Type	Clamping range D mm	Colour	Min. order- ing quan- tity Piece	Item no.
M-Quick 15-19LGR	15-19	Light grey	100	2153106
M-Quick 18-22LGR	18.5-22.5	Light grey	100	2153114
M-Quick 25-28LGR	25-28.5	Light grey	50	2153130
M-Quick 31-37LGR	31-37	Light grey	25	2153157

Flush-mounted clip to accept metric and PG pipes and Quick Pipe electrical installation pipes. Flexible clamping range of several millimetres. Universal fastening options on walls and ceilings and usable in a profile rail, both in indoor and protected outdoor areas. Toolless pipe mounting. Can also be arranged with OBO Quick clip or proQuick clip.

Type	Dim. A mm	Dim. B mm	Dim. E mm	Dim. F mm	Dim. H mm	Dim. h mm
M-Quick 15-19LGR	27.5	15.5	8	4.1	32	7
M-Quick 18-22LGR	33	15.5	8	4.1	37.5	7
M-Quick 25-28LGR	43	15.5	8	4.1	46	7
M-Quick 31-37LGR	55	15.5	8	4.1	58	7

Dimensions



PA




Multi-Quick clip, metric

Type	Clamping range D mm	Colour	Min. order- ing quan- tity Piece	Item no.
M-Quick M20 LGR	16-20	Light grey	100	2153718
M-Quick M25 LGR	20-25	Light grey	50	2153726
M-Quick M32 LGR	25-32	Light grey	50	2153734

Flush-mounted clip to accept metric pipes and Quick Pipe electrical installation pipes. Flexible clamping range of several millimetres. Universal fastening options on walls and ceilings, both indoors and outdoors. Toolless pipe mounting. Can also be arranged with OBO Quick or proQuick clip.


Type	Dim. A mm	Dim. B mm	Dim. E mm	Dim. F mm	Dim. H mm	Dim. h mm
M-Quick M20 LGR	27.5	15.5	8	4.1	32	7
M-Quick M25 LGR	33	15.5	8	4.1	37	7
M-Quick M32 LGR	43	15.5	8	4.1	46	7

Dimensions



proQuick clip

PA




Type	Clamping range D mm	Colour	Min. ordering quantity Piece	Item no.
PQ-10 LGR	9.5-12	Light grey	100	2147302
PQ-12 LGR	11.5-15	Light grey	100	2147304
PQ-15 LGR	14-16.5	Light grey	100	2147306
PQ-17 LGR	16-20	Light grey	100	2147308
PQ-20 LGR	19.5-23.5	Light grey	50	2147310
PQ-25 LGR	24-28	Light grey	50	2147312
PQ-28 LGR	27.5-32	Light grey	50	2147314
PQ-32 LGR	31.5-35.5	Light grey	50	2147316
PQ-36 LGR	35-40	Light grey	25	2147318
PQ-40 LGR	39.5-44.5	Light grey	25	2147320
PQ-47 LGR	44-50	Light grey	25	2147324
PQ-51 LGR	48-55	Light grey	15	2147326
PQ-59 LGR	58.5-65	Light grey	15	2147328

Highly stable clip to accept plastic and metal electrical and sanitary pipes, as well as the Quick Pipe electrical installation pipe. Universal fastening options on walls, ceilings and steel structures, both indoors and outdoors. Flexible clamping range of several millimetres. Tool-less pipe mounting. Can be arranged to up to Ø 32 mm, also with OBO Quick clip or Multi-Quick clip. Can be mounted on profile rails for variable spacings and numbers of clips.

proQuick clip

PA




Type	Clamping range D mm	Colour	Min. ordering quantity Piece	Item no.
PQ-10 SWS	9.5-12	Signal white	20	2147360
PQ-12 SWS	11.5-15	Signal white	20	2147362
PQ-15 SWS	14-16.5	Signal white	20	2147364
PQ-17 SWS	16-20	Signal white	20	2147366
PQ-20 SWS	19.5-23.5	Signal white	10	2147368
PQ-25 SWS	24-28	Signal white	10	2147370
PQ-28 SWS	27.5-32	Signal white	10	2147372
PQ-32 SWS	31.5-35.5	Signal white	10	2147374

Highly stable clip to accept plastic and metal electrical and sanitary pipes, as well as the Quick Pipe electrical installation pipe. Universal fastening options on walls, ceilings and steel structures, both indoors and outdoors. Flexible clamping range of several millimetres. Tool-less pipe mounting. Can be arranged to up to Ø 32 mm, also with OBO Quick clip or Multi-Quick clip. Can be mounted on profile rails for variable spacings and numbers of clips.


proQuick clip

PA



Type	Clamping range D mm	Colour	Min. ordering quantity Piece	Item no.
PQ-20 SW	19.5-23.5	Jet black	50	2147340

Highly stable clip to accept plastic and metal electrical and sanitary pipes, as well as the Quick Pipe electrical installation pipe. Universal fastening options on walls, ceilings and steel structures, both indoors and outdoors. Flexible clamping range of several millimetres. Tool-less pipe mounting. Can be arranged to up to Ø 32 mm, also with OBO Quick clip or Multi-Quick clip. Can be mounted on profile rails for variable spacings and numbers of clips.

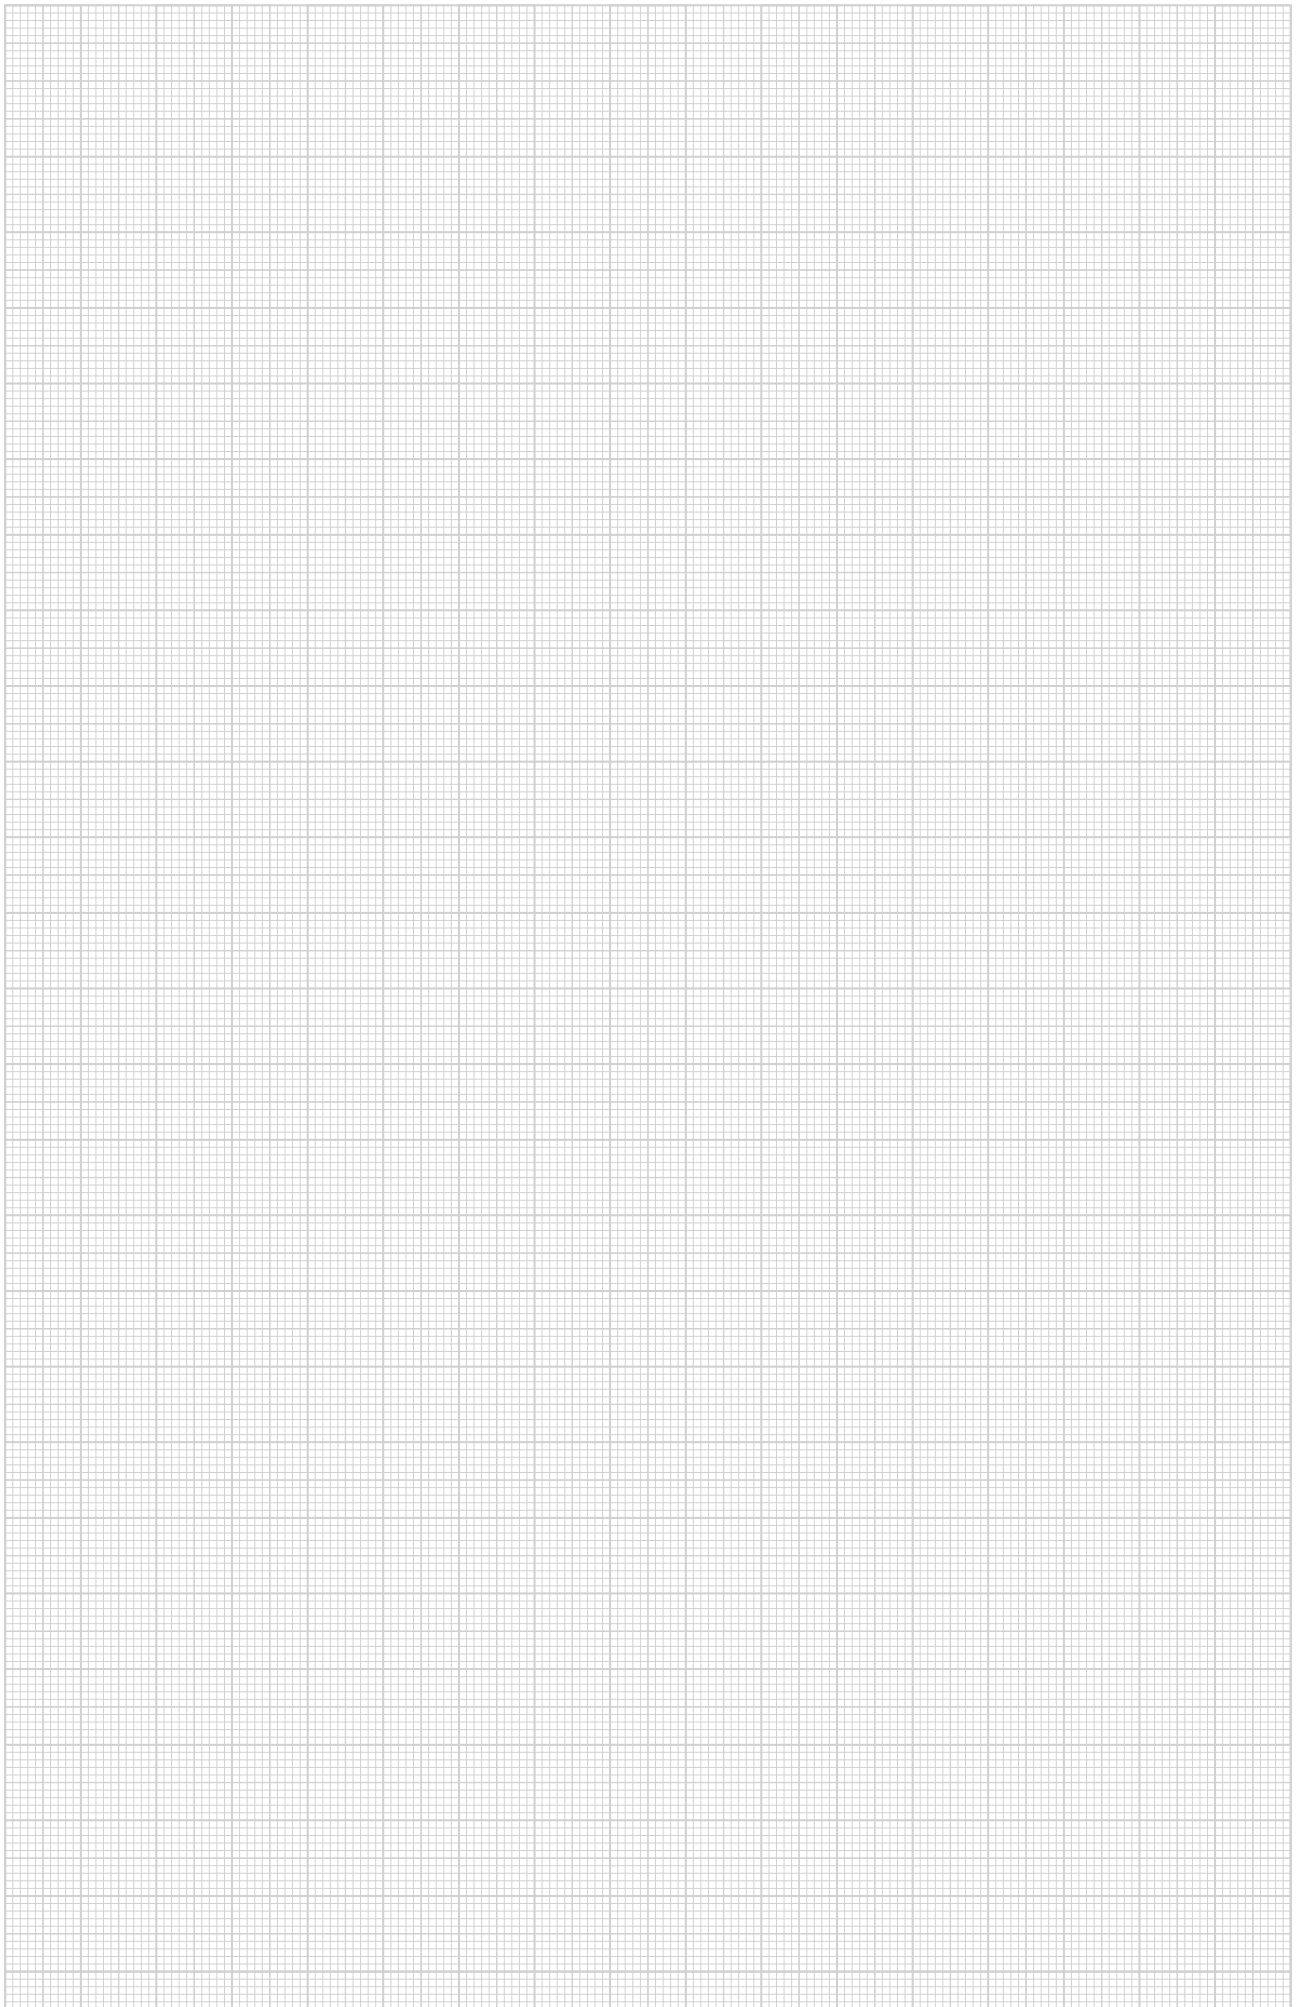

OBO Bettermann Holding GmbH & Co. KG
Hüingser Ring 52
58710 Menden
GERMANY

Customer Service Germany
Tel. +49 (0)2373 89-2000
info@obo.de

www.obo-bettermann.com

© OBO BETTERMANN Order no 000000 06/2025 EN