
Technical data sheet

Connection clamp for earth rod, universal FT

Item number: 5001668

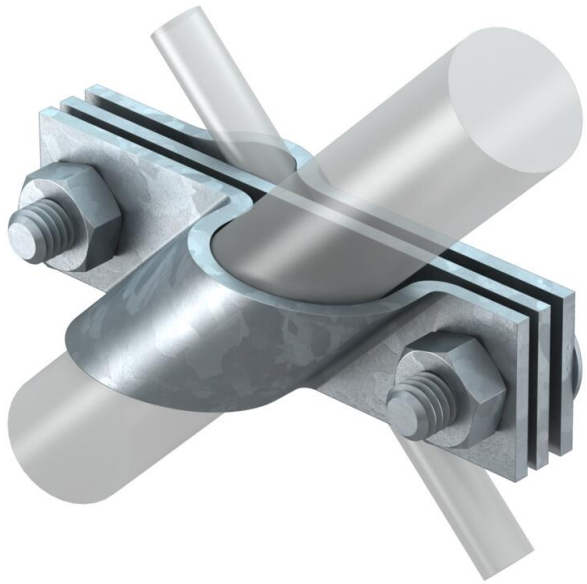

- Suitable for attaching round conductors Rd 8-10 or flat conductors to FL 40
- With separator plate
- Installed with 2 hexagonal bolts M10 x 30 and 2 hexagonal nuts M10

St Steel

FT Hot-dip galvanised

Master data


Item number	5001668
Type	2760 25 FT
Description 1	Connection clamp
Description 2	for round and flat conductors
Manufacturer	OBO
Dimension	25mm
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	5
Unit of quantity	Piece
Weight	38.4 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,7639 kg CO2e / 1 Piece

Technical data sheet

Connection clamp for earth rod, universal FT

Item number: 5001668

Dimensions

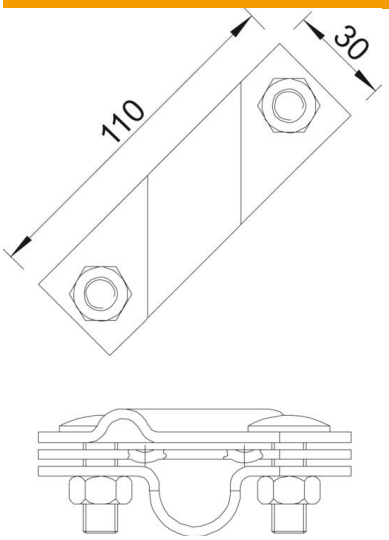

Dimension A	110 mm

Technical data

Type	Connection clip
Earthing connection diameter	25 mm
for earth rods	25 mm
Suitable for round conductor diameters, max.	10 mm
Suitable for round conductor diameters, min.	8 mm
Short-circuit current (50 HZ)(1 s; ≤300°C)	8.5 kA
Fit	Rd 8-10/FL40 mm
ROHS-conformant	yes
Intermediate plate	yes
Clamping range, max.	10 mm
Clamping range, min.	8 mm