Technical data sheet

A 8 junction box, OBO EcoLine

Item number: 2000018



A series EcoLine junction box for the connection of cables indoors and in protected outdoor are
Square form, with pre-embossed cable entries. Seven entries for cable diamters of 5–14 mm.
Non-transparent cover to lock on. Made from halogen-free materials.
Containing recycled material. Protection rating IP55.
Flame resistant to VDE 0471/DIN 695 Part 2-1, test temperature 650 °C.
Nominal voltage 690 V, nominal cross-section 2.5 mm²
Dimensions: 75 x 75 x 36.2 mm
Internal clearance: 65 x 65 x 32 mm
For every 10 sockets 1 cutting tool

650° HALOGEN FREE IK 07 IP 55 2,5 mm² 7 690 V OBO EcoLine

PE ECO Polyethylene Eco

Master data


Item number	2000018
Type	A 8 ECO
Description 1	Junction box
Available from	06.03.2026
Manufacturer	OBO
Dimension	75x75x36
Colour	Light grey; RAL 7035
Material	Polyethylene Eco
Smallest sales unit	10
Unit of quantity	Piece
Weight	3.813 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,0501 kg CO2e / 1 Piece


Technical data sheet

A 8 junction box, OBO EcoLine

Item number: 2000018

Dimensions

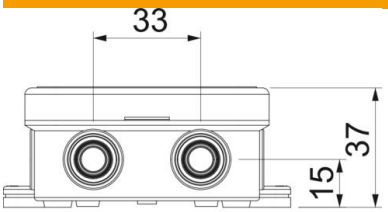

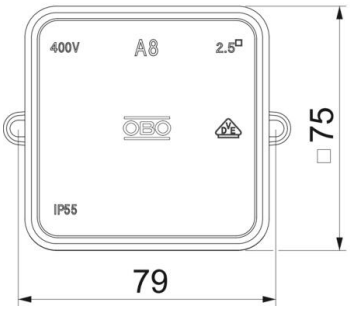

Length	75 mm
Width	75 mm
Height	36.7 mm

Technical data

Expandable	yes
No. of entries	7
Type of entry	Cable
Type of entry	Cable
Type of housing penetration	Pre-marking
Measured insulation voltage Vi	690 V
Equipment	Without
Cover	Not transparent
Cover fastening	Locking
Entry from rear	no
Entries	7 entries for cable diameter 5–14 mm
Explosion-tested version	no
Flame-resistant	acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C
Shape	Square
Maintain electrical functions	Without
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
Halogen-free	yes
Clear internal dimensions	65x65x32 mm
Max. Conductor cross-section	2.5 mm²
With screening	no
with lid	yes
Mounting in the earth	no
Mounting underwater	no
Mounting type	Wall/ceiling mounting
Nominal cross-section, min.	2.5 mm²
Nominal voltage	690 V

Technical data sheet

A 8 junction box, OBO EcoLine

Item number: 2000018

Technical data

Sealable	no
ROHS-conformant	yes
Protection rating	IP55
Permitted temperature range, max.	45 °C
Permitted temperature range, min.	-5 °C
Transparent lid	no
Castable	no
Sealing compound supplied	no
Weatherproof	no
Junction box cover version	Blanking lid