




The tour de force amongst anchors



The Delta-Push® allows flexible use in any installation situation. Its innovative geometry offers high extraction values of up to 40 kg in different substrates

More advantages at a glance:

- Easily combined with a wide range of other OBO products
- Halogen-free
- UV-resistant
- Extraction forces up to 40 kg*
- Updated extraction values for hollow brick underscore wide range of applications

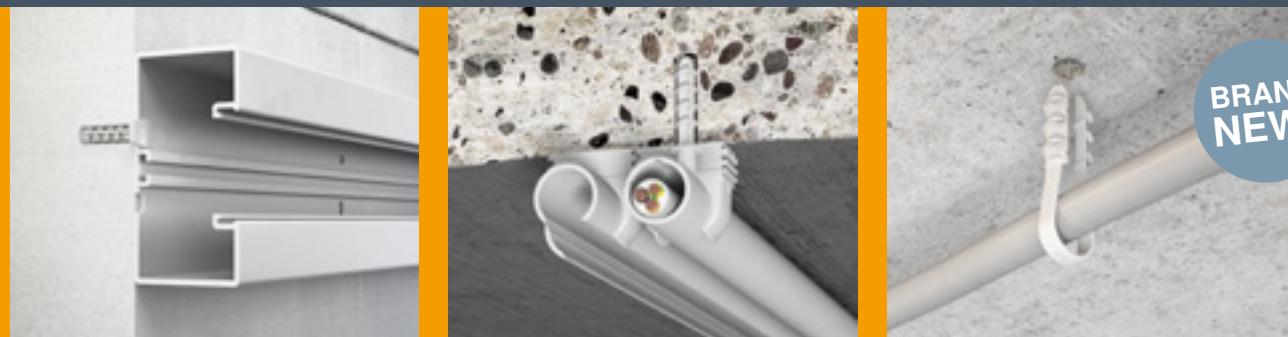

www.obo-bettermann.com


Building Connections

OBO
BETTERMANN

OBO Delta-Push®

Four variants offer solutions for any challenge

Push-fit anchor for pushing in




Type	Weight kg/100 units	Smallest packaging unit	Colour	Item no.
DP D 30	0.083	100	Light grey	2351670

Toolless mounting by pushing into a drill hole in a wall or on a ceiling. To install cable trunking or labelling panels, for example.

PA Ø6



Push-fit anchor with M6 thread




Type	Weight kg/100 units	Smallest packaging unit	Colour	Item no.
DP GM6 30	0.072	100	Light grey	2351673

Push-fit anchor for mounting electrical installations – without any tools or screws. With M6 thread for screwing on Quick clips, for example.

PA Ø6



Push-fit anchor for cable ties




Type	Weight kg/100 units	Smallest packaging unit	Colour	Item no.
DP KB 30	0.075	100	Light grey	2351676

Push-fit anchor with cable tie seat up to 4.8 mm in width and 2.0 mm in height to fasten cables and pipes.

PA Ø6



Push-fit anchor with loop fastening



Type	Weight kg/100 units	Smallest packaging unit	Colour	Item no.
DP S 30	0.063	100	Light grey	2351679

Push-fit anchor for mounting light loads in the electrical installation. Without screws. With reclosable loop for fastening cables.

PA Ø6



* This value does not include a safety factor. But what is an extraction force, exactly? The extraction force indicates the maximum force at which the component fails under axial load due to breakage, or is pulled out of the drill hole by the force applied.

The safety factor, which is also known as the factor of safety or safety coefficient, indicates the factor used to increase the failure limit of a component.

OBO Bettermann Holding GmbH & Co. KG
Hüingser Ring 52
58710 Menden
GERMANY

Customer Service Germany
Tel. +49 (0)2373 89-2000
info@obo.de
www.obo-bettermann.com